ASSEMBLY INSTRUCTIONS


PARTS BAG	5712		DE	DEMCO Newspaper Tower		
Parts #10 x 5/8" Trusshead Screw 50mm One-Piece Connector Bolt Hex Key	Quantity 34 3 1	Referenc A B C	A S	B	©	

PARTS LIST				1	
Parts Side Panels Base Plate Racks Corner Extrusion Top Cap	Quantity 3 1 15 3 1	Reference D E F G H	(D)	E	(G) (H)


STEP 1

!! IMPORTANT !!

Before assembly be sure to remove the (2) Support Bolts & (2) Wing Nuts, so that the base plate spins properly.

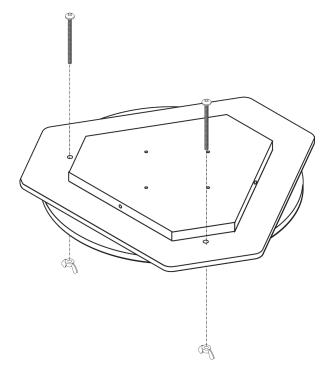




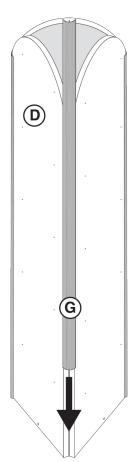

Revised 8/28/06 Page 1 of 2



Attach assembly to the **Spinner Base (E)** using (3) **50mm One Piece** Connecting Bolts (B), as shown.

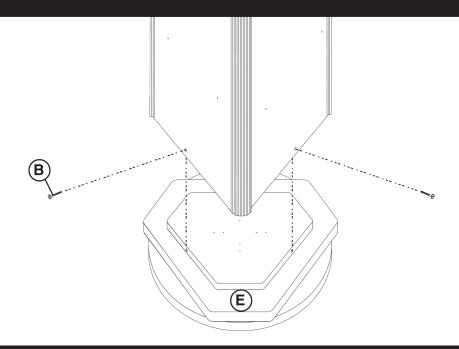


STEP 3

NOTE: Peel masking film from

Racks (F) before assembling.

Connect **Racks (F)** to fixture using **#10 x 5/8" Trusshead** Screws (A). Install Top Cap (H) inserting in top center opening and resting on tops of Corner Extrusions (G).

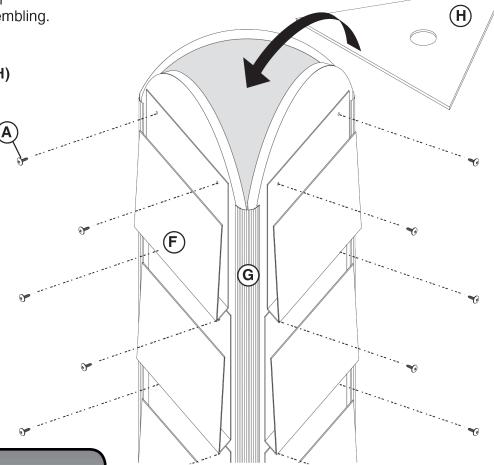



Find Demco® Magazine/Newspaper Towers @demco.com Search: 1493561

Call 800.962.4463 or email custserv@demco.com

Page 2 of 2